



KENYA URBAN ROADS AUTHORITY

Efficient and safe urban roads

Barabara Plaza, Mazao Road - Off South Airport Road, JKIA

Tel: 254-020-8013844 / 254-717-105233

Email: info@kura.go.ke Web: www.kura.go.ke

P.O. Box 41727-00100, GPO, NAIROBI

Ref.No. KURA/EO/SCM/3/Vol.29 (92)

Date: 21st October, 2021

To All Bidders,

RE: 1.UPGRADING TO BITUMEN STANDARD OF BANISA TOWNSHIP ROADS

TENDER NO. KURA/DEV/HQ/256/2021-2022

2. CONSTRUCTION OF BUTE TOWNSHIP ROADS

TENDER NO.KURA/DEV/HQ/255/2021-2022

3. CONSTRUCTION OF ELDAS TOWNSHIP ROADS

TENDER NO.KURA/DEV/HQ/257/2021-2022

4. CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS

TENDER NO.KURA/DEV/HQ/258/2021-2022

5. UPGRADING TO BITUMEN STANDARDS OF MANDERA TOWN ROADSPHASE II

TENDER NO.KURA/DEV/HQ/259/2021-2022

ADDENDUM NO.2

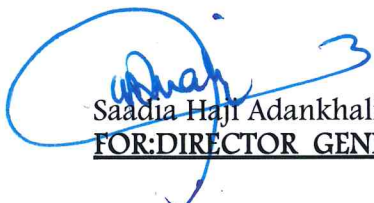
This is to notify all bidders that an addendum has been issued for the above mentioned tenders.

All bidders are required to take note of this addendum and incorporate it in their bid before tender submission.

S/No	Contract Name.	Tender No.	Addendum No.2
1.	Upgrading to Bitumen Standards of Banisa Township Roads	KURA/DEV/HQ/256 /2021-2022	• See attached Appendix E and F Bills of Quantities.
2.	Construction of Bute Township Roads	KURA/DEV/HQ/255 /2021-2022	• See attached Appendix D Bills of Quantities.
3.	Construction of Eldas Township Roads	KURA/DEV/HQ/257 /2021-2022	• See attached Appendix C Bills of Quantities.
4.	Construction of Habaswein Township Roads	KURA/DEV/HQ/258 /2021-2022	• See attached Appendix A Bills of Quantities.
5.	Upgrading to Bitumen Standards of Mandera Town Roads Phase II	KURA/DEV/HQ/259 /2021-2022	• See attached Appendix B Bills of Quantities

The submission date of the tender documents has been extended to **29th October, 2021** and the tender opening date shall be **1st November, 2021**.

Details of the addendum can be accessed on www.kura.go.ke.


Saadia Haji Adankhalif

FOR:DIRECTOR GENERAL

APPENDIX D

CONSTRUCTION OF BUTE TOWNSHIP ROADS
KURA/DEV/HQ/255/2021-2022-ADDENDUM NO.02

CONSTRUCTION OF BUTE TOWNSHIP ROADS
KURA/DEV/HQ/255/2021-2022-ADDENDUM NO.02

BILL 1	PRELIMINARY AND ADMINISTRATION OVERHEADS	Units	Quantity	Unit Rate(KSh)	Amount KSh
1.01	Provide and maintain the Engineer's office as per the specifications	PC Sum	1.00	2,000,000.00	2,000,000.00
1.02	Include a percentage on Item 1.01 for the Contractor's Overheads and Profit	%	2,000,000.00		
1.03	Provide and maintain furniture and equipment for the Engineer's office as specified for the Contract period	PC Sum	1.00	1,000,000.00	1,000,000.00
1.04	Include a percentage on Item 1.03 for the Contractor's Overheads and Profit	%	1,000,000.00		
1.05	Provide Engineers's Laboratory structure , Laboratory equipment and reagents for use by the Engineer's Representative's and his staff for entire duration	PC Sum	1.00	3,000,000.00	3,000,000.00
1.06	Include a percentage on Item 1.05 for the Contractor's Overheads and Profit	%	3,000,000.00		
1.07	Allow a provisional sum of KShs. 1,000,000 for offsite Material Testing as directed by the Engineer	PC Sum	1.00	1,000,000.00	1,000,000.00
1.08	Extra over item 1.07 for contractors' overheads and profits	%	1,000,000.00		
1.09	Provide with driver and maintain Two (2) Type 2 vehicle, with 2.5 - 2.8 litre turbocharged 4-wheel drive vehicle or similar as per the Engineer's instructions and approval, fitted with air bags, mobile telephone hand free headset and a two way radio for the exclusive use of the Engineer inclusive of the first 4,000 km per vehicle month.	V. Month			
	a) 2 No. Type 2		48.00		
1.1	Extra Over on Item 1.09 inclusive of fuels, maintenance, lubricants and servicing for kilometrage over 4,000 km per vehicle month.	km	50,000.00		

CONSTRUCTION OF BUTE TOWNSHIP ROADS
KURA/DEV/HQ/255/2021-2022-ADDENDUM NO.02

1.11	Allow a Provisional Sum of KShs 3,000,000 for the Engineer's miscellaneous account to be spent in whole or part as instructed by the Engineer and to be reimbursed against receipts.	PC Sum	1.00	3,000,000.00	3,000,000.00
1.12	Extra over item on item 1.11 for contractors' overheads and profits.	%	3,000,000.00		
1.13	Provide, erect and maintain publicity signs as instructed by the Engineer.	№	2.00		
1.14	Allow provisional sum on 2,000,000.00 for Engineer's staff Overtime during the contract period.	PC Sum	1.00	2,000,000.00	2,000,000.00
1.15	Include a percentage on Item 1.14 for the Contractor's Overheads and Profit	%	2,000,000.00		
1.16	Allow for attendance upon the Engineer by the following staff in accordance with Clause 137 of Special Specification	Prov. Sum			
	Assistant Engineer	M.mth	24.00	100,000.00	2,400,000.00
	Inspector of works	M.mth	36.00	70,000.00	2,520,000.00
	Labaratory Technician	M.mth	36.00	50,000.00	1,800,000.00
	Survey Assistant	M.mth	24.00	40,000.00	960,000.00
	Labaratory Assistant	M.mth	36.00	30,000.00	1,080,000.00
	Environmentalst/Sociologist	M.mth	24.00	30,000.00	720,000.00
	Office Assistants	M.mth	24.00	30,000.00	720,000.00
	Levellers	M.mth	24.00	25,000.00	600,000.00
	Secretary	M.mth	24.00	25,000.00	600,000.00
	General Attendants	M.mth	36.00	25,000.00	900,000.00
	Secretary	M.mth	24.00	25,000.00	600,000.00
	General Attendants	M.mth	24.00	25,000.00	600,000.00
1.17	Include a percentage on Item 1.16 for the Contractor's Overheads and Profit	%	13,500,000.00		

CONSTRUCTION OF BUTE TOWNSHIP ROADS
KURA/DEV/HQ/255/2021-2022-ADDENDUM NO.02

1.18	Allow a Provisional Sum of KShs 500,000 for the Engineer's staff mobile phone airtime charges	Prov. Sum	1.00	500,000.00	500,000.00
1.19	Include a percentage on Item 1.18 for the Contractor's Overheads and Profit	%	500,000.00		
1.2	Provide and maintain survey equipment for the Engineer's office as specified for the Contract period	PC Sum	1.00	2,000,000.00	2,000,000.00
1.21	Include a percentage on Item 1.20 for the Contractor's Overheads and Profit	%	2,000,000.00		
1.22	Provide PC Sum of Kshs.4,000,000 to facilitate attendance of site meetings.	PC Sum	1.00	4,000,000.00	4,000,000.00
1.23	Include a percentage on Item 1.22 for the Contractor's Overheads and Profit	%	4,000,000.00		
1.24	Allow for Engineer's staff Accomodation and Housing in accordance to clause 132.1 of Special Specifications.	PC Sum	1.00	2,500,000.00	2,500,000.00
1.25	Include a percentage on Item 1.24 for the Contractor's Overheads and Profit	%	2,500,000.00		
	Total Carried Forward to Summary:				



CONSTRUCTION OF BUTE TOWNSHIP ROADS
KURA/DEV/HQ/255/2021-2022-ADDENDUM NO.02

BILL 8	CULVERTS AND DRAINAGE WORKS	Units	Quantity	Unit Rate(Ksh)	Amount KSh
	No separate payments shall be made for the overhaul of the material and the cost of such haulage shall be included in the rates and or prices.				
8.01	Excavate in soft material to the range of depths stated below for pipe culverts, subsoil drains, headwalls, wing walls, aprons, toe walls, drop inlets, mitre drains, cut off drains, outfall to free flowing, catch water drains and median drains including support of trench sides, backfilling and compacting as specified or as instructed by the Engineer.	m ³	5,184.00		
8.02	As Item 8.01 but hard material (requiring no blasting)	m ³	1,000.00		
8.02	Provide, lay and joint 300mm or 450 mm I.D. Reinforced Cement Concrete pipes for Service ducts as per the drawings or as instructed by the Engineer	m	150.00		
8.03	Provide, lay and joint 600 mm I.D. Reinforced Cement Concrete pipes including class 15/20 concrete haunching	m	350.00		
8.04	Provide, lay and joint 900 mm Internal Diameter (I.D.) Reinforced Cement Concrete pipes class 15/20 concrete haunching	m	50.00		
8.05	Provide, lay and joint 1200 mm I.D. Reinforced Cement Concrete pipes	m	20.00		

OP Bm

CONSTRUCTION OF BUTE TOWNSHIP ROADS
KURA/DEV/HQ/255/2021-2022-ADDENDUM NO.02

8.06	Provide and place A142 fabric mesh reinforcement or equivalent for item 8.07, wing walls, toe walls and headwalls	m2	1265		
8.07	Provide, place and compact class 15/20 for bedding	m3	490		
8.08	Provide and place Class 20/20 concrete for side walls, bed for stone pitched drain, trenches, drains, retaining walls, toe walls, head walls, rest crushed sand including formwork and wing walls and aprons, 20% natural and provision and placing of reinforcement as shown on the drawings or as instructed by the Engineer.	m3	540.00		
8.09	Provide and place class 25/20 concrete as directed by Engineer	M3	100.00		
8.1	Provide, lay and joint 450mm x 225mm Invert Block Drain (IBD) complete with 2 side slabs as per the specifications or as instructed by the Engineer.	m	500		
8.11	Extra over Item 8.10 for precast sideslab of 600x225 75mm	M2	100.00		
8.12	Provide stone pitching for lining for drains	m2	7,500.00		
8.13	Provide class 20/20 for drainage bed	m3	487.50		
	Total Carried Forward to Summary:				

 Bann

CONSTRUCTION OF BUTE TOWNSHIP ROADS
KURA/DEV/HQ/255/2021-2022-ADDENDUM NO.02

BILL 16	BITUMINOUS MIXES	Units	Quantity	Unit Rate(Ksh)	Amount KSh
16.01	Prepare surfaces, provide, mix, lay and compact Asphaltic Concrete (AC) (Type 1) thickness 50 mm as wearing course and 0/20 mm aggregates on prepared surface on base layer	M ³	2,808.00		
16.02	Prepare surfaces, provide, mix, lay and compact Asphaltic Concrete (AC) (Type 1) of thickness 35 mm as wearing course and 0/14 mm aggregates on prepared surface on base layer	M ³	670		
	Total Carried Forward to Summary:				

BILL 23	PAVING BLOCKS	Units	Quantity	Unit Rate(Ksh)	Amount KSh
23.01	Supply, lay and compact 50mm thick precast concrete paving blocks with 49N/mm ² cube crushing strength conforming to BS 6717 Part I of 1986 or KEBS equivalent standard	m ²	200.00		
23.02	Provide, spread, 50mm thick quarry dust for voids and as layer above gravel	M ³	50.00		
	BILL 23 TOTAL CARRIED TO SUMMARY PAGE				

CONSTRUCTION OF BUTE TOWNSHIP ROADS
KURA/DEV/HQ/255/2021-2022-ADDENDUM NO.02

