



KENYA URBAN ROADS AUTHORITY

Efficient and safe urban roads

Barabara Plaza, Mazao Road - Off South Airport Road, JKIA

Tel: 254-020-8013844 / 254-717-105233

Email: info@kura.go.ke Web: www.kura.go.ke

P.O. Box 41727-00100, GPO, NAIROBI

Ref.No. KURA/EO/SCM/3/Vol.29 (92)

Date: 21st October, 2021

To All Bidders,

RE: 1.UPGRADING TO BITUMEN STANDARD OF BANISA TOWNSHIP ROADS

TENDER NO. KURA/DEV/HQ/256/2021-2022

2. CONSTRUCTION OF BUTE TOWNSHIP ROADS

TENDER NO.KURA/DEV/HQ/255/2021-2022

3. CONSTRUCTION OF ELDAS TOWNSHIP ROADS

TENDER NO.KURA/DEV/HQ/257/2021-2022

4. CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS

TENDER NO.KURA/DEV/HQ/258/2021-2022

5. UPGRADING TO BITUMEN STANDARDS OF MANDERA TOWN ROADSPHASE II

TENDER NO.KURA/DEV/HQ/259/2021-2022

ADDENDUM NO.2

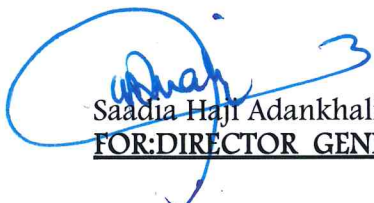
This is to notify all bidders that an addendum has been issued for the above mentioned tenders.

All bidders are required to take note of this addendum and incorporate it in their bid before tender submission.

S/No	Contract Name.	Tender No.	Addendum No.2
1.	Upgrading to Bitumen Standards of Banisa Township Roads	KURA/DEV/HQ/256 /2021-2022	• See attached Appendix E and F Bills of Quantities.
2.	Construction of Bute Township Roads	KURA/DEV/HQ/255 /2021-2022	• See attached Appendix D Bills of Quantities.
3.	Construction of Eldas Township Roads	KURA/DEV/HQ/257 /2021-2022	• See attached Appendix C Bills of Quantities.
4.	Construction of Habaswein Township Roads	KURA/DEV/HQ/258 /2021-2022	• See attached Appendix A Bills of Quantities.
5.	Upgrading to Bitumen Standards of Mandera Town Roads Phase II	KURA/DEV/HQ/259 /2021-2022	• See attached Appendix B Bills of Quantities

The submission date of the tender documents has been extended to **29th October, 2021** and the tender opening date shall be **1st November, 2021**.

Details of the addendum can be accessed on www.kura.go.ke.


Saadia Haji Adankhalif
FOR: DIRECTOR GENERAL

CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS
KURA/DEV/HQ/258/2021-2022-ADDENDUM NO.2

APPENDIX A

CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS
KURA/DEV/HQ/258/2021-2022-ADDENDUM NO.2



Bam

CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS
KURA/DEV/HQ/258/2021-2022-ADDENDUM NO.2

Bill of Quantities					
Item No.	Description	Units	Quantity	Rate	Amount (KSh)
BILL 1	PRELIMINARY AND ADMINISTRATION OVERHEADS				
1.01	Provide and maintain the Engineer's office as per the specifications	PC Sum	1	1,200,000.00	1,200,000.00
1.02	Extra over item 1.01 for contractor's overheads and profits	%	1,200,000.00		
1.03	Provide and maintain furniture and equipment for the Engineer's office as specified for the Contract period	PC Sum	1	1,000,000.00	1,000,000.00
1.04	Extra over item 1.03 for contractor's overheads and profits	%	1,000,000.00		
1.05	Provide Engineers's Laboratory structure, Laboratory equipment and reagents for use by the Engineer's Representative's and his staff for entire duration of the contract.	PC Sum	1	2,000,000	2,000,000
1.06	Extra over item 1.05 for contractor's overheads and profits	%	2,000,000		
1.07	Allow a provisional sum of KShs. 2,000,000 for offsite Material Testing as directed by the Engineer	PC Sum	1	2,000,000	2,000,000
1.08	Extra over item 1.07 for contractor's overheads and profits	%	2,000,000		
1.09	Provide, fuel, insure and maintain with driver, 1 No. new 4WD station wagon vehicle Diesel propelled, with engine capacity of not less than 3000cc for the exclusive use by the Resident Engineer inclusive of the first 4000km per vehicle month	v. mth	24		
1.1	Extra over item 4000km on item 1.08 for contractor's overheads and profits.	km	20,000		
1.11	Provide, fuel, insure and maintain with driver 1No. new 4WD double cabin Diesel propelled, with engine capacity of not less than 2500cc for the exclusive use by the Resident Engineer inclusive	V. Month	24		

CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS
KURA/DEV/HQ/258/2021-2022-ADDENDUM NO.2

	of the first 4000km per vehicle month				
1.12	Extra over item 4000km on item 1.11 for contractors' overheads and profits.	km	20,000		
1.13	Allow a Provisional Sum of KShs 2,500,000 for the Engineer's miscellaneous account to be spent in whole or part as instructed by the Engineer and to be reimbursed against receipts.	Prime Cost	1	2,500,000	2,500,000
1.14	Extra over item on item 1.13 for contractor's overheads and profits.	%	2,500,000		
1.15	Provide, erect and maintain publicity signs as instructed by the Engineer.	No	2		
1.16	Allow for attendance upon the Engineer by the following staff in accordance with Clause 137 of Special Specification	PC Sum			
	Assistant Engineer	M.mth	24	100,000.00	2,400,000.00
	Inspector of works	M.mth	48	70,000.00	3,360,000.00
	Laboratory Technician	M.mth	24	50,000.00	1,200,000.00
	Survey Assistant	M.mth	48	40,000.00	1,920,000.00
	Laboratory Assistant	M.mth	48	35,000.00	1,680,000.00
	Environmentalist/Sociologist	M.mth	24	35,000.00	840,000.00
	Office Assistants	M.mth	24	35,000.00	840,000.00
	Levellers	M.mth	24	35,000.00	840,000.00
	Secretary	M.mth	24	35,000.00	840,000.00
	General Attendants	M.mth	48	35,000.00	1,680,000.00
1.17	Extra over item 1.16 for contractors' overheads and profits	%	15,600,000.00		

CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS
KURA/DEV/HQ/258/2021-2022-ADDENDUM NO.2

1.18	Allow a Provisional Sum of KShs 1,000,000 for the Engineer's staff mobile phone airtime charges	Prov. Sum	1	1,000,000	1,000,000.00
1.19	Include a percentage on Item 1.18 for the Contractor's Overheads and Profit	%	1,000,000		
1.2	Provide PC Sum of Kshs. 4,000,000 for Engineer site staff allowances in accordance to clause 137 of Special Specifications.	PC Sum	1	4,000,000	4,000,000.00
1.21	Include a percentage on Item 1.20 for the Contractor's Overheads and Profit	%	4,000,000		
1.22	Provide PC Sum of Kshs. 3,000,000 to facilitate attendance of site meetings.	PC Sum	1	3,000,000	3,000,000.00
1.23	Include a percentage on Item 1.22 for the Contractor's Overheads and Profit	%	3,000,000		
1.24	Provide and maintain survey equipment for the Engineer's office as specified for the Contract period	PC Sum	1	3,500,000.00	3,500,000.00
1.25	Extra over item 1.24 for contractor's overheads and profits	%	3,500,000.00		
	Total Carried Forward to Summary:				

BILL 8	CULVERTS AND DRAINAGE WORKS				
Item No.	Description	Units	Quantity	Rate	Amount (KSh)
	<i>No separate payments shall be made for the overhaul of the material and the cost of such haulage shall be included in the rates and or prices.</i>				

 *Bam*

CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS
KURA/DEV/HQ/258/2021-2022-ADDENDUM NO.2

8.01	Excavate in soft material to the range of depths stated below for pipe culverts, subsoil drains, headwalls, wing walls, aprons, toe walls, drop inlets, mitre drains, cut off drains, outfall to free flowing, catch water drains and median drains including support of trench sides, backfilling and compacting as specified or as instructed by the Engineer.	m ³	7,500		
8.02	As Item 8.01 but hard material (requiring no blasting)	m ³	750		
8.03	Provide, lay, joint and backfill with suitable material 300mm I.D. concrete pipes for service ducts	m	200		
8.04	Provide, lay, join and backfill with suitable material 450mm I.D. concrete pipes	m	100		
8.05	Provide, lay, joint and backfill with suitable material 600mm I.D. concrete pipes	m	500		
8.06	Provide, lay, joint and backfill with suitable material 900mm I.D. concrete pipes	m	100		
8.07	Provide, lay, joint and backfill with suitable material 1200mm I.D. concrete pipes	m	50		
8.08	Provide and place A142 fabric mesh reinforcement or equivalent for item 8.07	m ²	500		
8.09	Provide, place and compact Class 15(20) concrete to beds, surrounds and haunches including all formwork and provision and placing of reinforcement as shown in the drawings.	m ³	750		
8.1	Provide and place Class 25/20 concrete for side walls, top slabs, trenches, drains, retaining walls, toe walls, head walls, rest crushed sand including formwork and wing walls and aprons, 20% natural and provision and placing of reinforcement as shown on the drawings or as instructed by the Engineer.	m ³	150		

CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS
KURA/DEV/HQ/258/2021-2022-ADDENDUM NO.2

8.11	Excavate in any material provide and joint 600x360 mm invert block drains (IBD) precast concrete channels with single side precast side slabs of 600x225x75 mm as lining for storm water drain including bedding and backfilling with selected material as directed by the Engineer.	m	100		
8.12	Provide class 20/20 for drainage bed	m ³	562.50		
8.13	Extra over item 8.13 for precast side slabs of 600x225x75mm.	m ²	54		
8.14	Provide and place 200mm thick stone pitching including grouting to outfall drains as detailed in the drawings or as directed by the Engineer	m ²	11250		
	Total Carried Forward to Summary:				

BILL 16		BITUMINOUS MIXES			
Item No.	Description	Units	Quantity	Rate	Amount (KSh)
16.01	Prepare surfaces, provide, mix, lay and compact Asphaltic Concrete (AC) (Type 1) as wearing course of thickness 50mm on base with bitumen and 0/20 mm aggregates on prepared surface of asphalt base layer of carriageway	m ³	2681.25		
16.02	Prepare surfaces, provide, mix, lay and compact Asphaltic Concrete (AC) (Type 1) as wearing course of thickness 35mm on base with bitumen and 0/14 mm aggregates on footpath.	m ³	616		
	Total Carried Forward to Summary:				

 Ban

CONSTRUCTION OF HABASWEIN TOWNSHIP ROADS
KURA/DEV/HQ/258/2021-2022-ADDENDUM NO.2

BILL 23		CONCRETE PAVING BLOCKS			
Item No.	Description	Units	Quantity	Rate	Amount (KSh)
23.01	Supply, lay and compact 60mm thick coloured light duty precast concrete paving blocks with a 25 N/mm ² Cube crushing strength conforming to BS 6717 Part 1 of 1986 or Kenya Bureau of Standard equivalent including 30mm thick dust sand/quarry dust.	m ²	100		
	Total Carried Forward to Summary:				

Dr Sam

①